



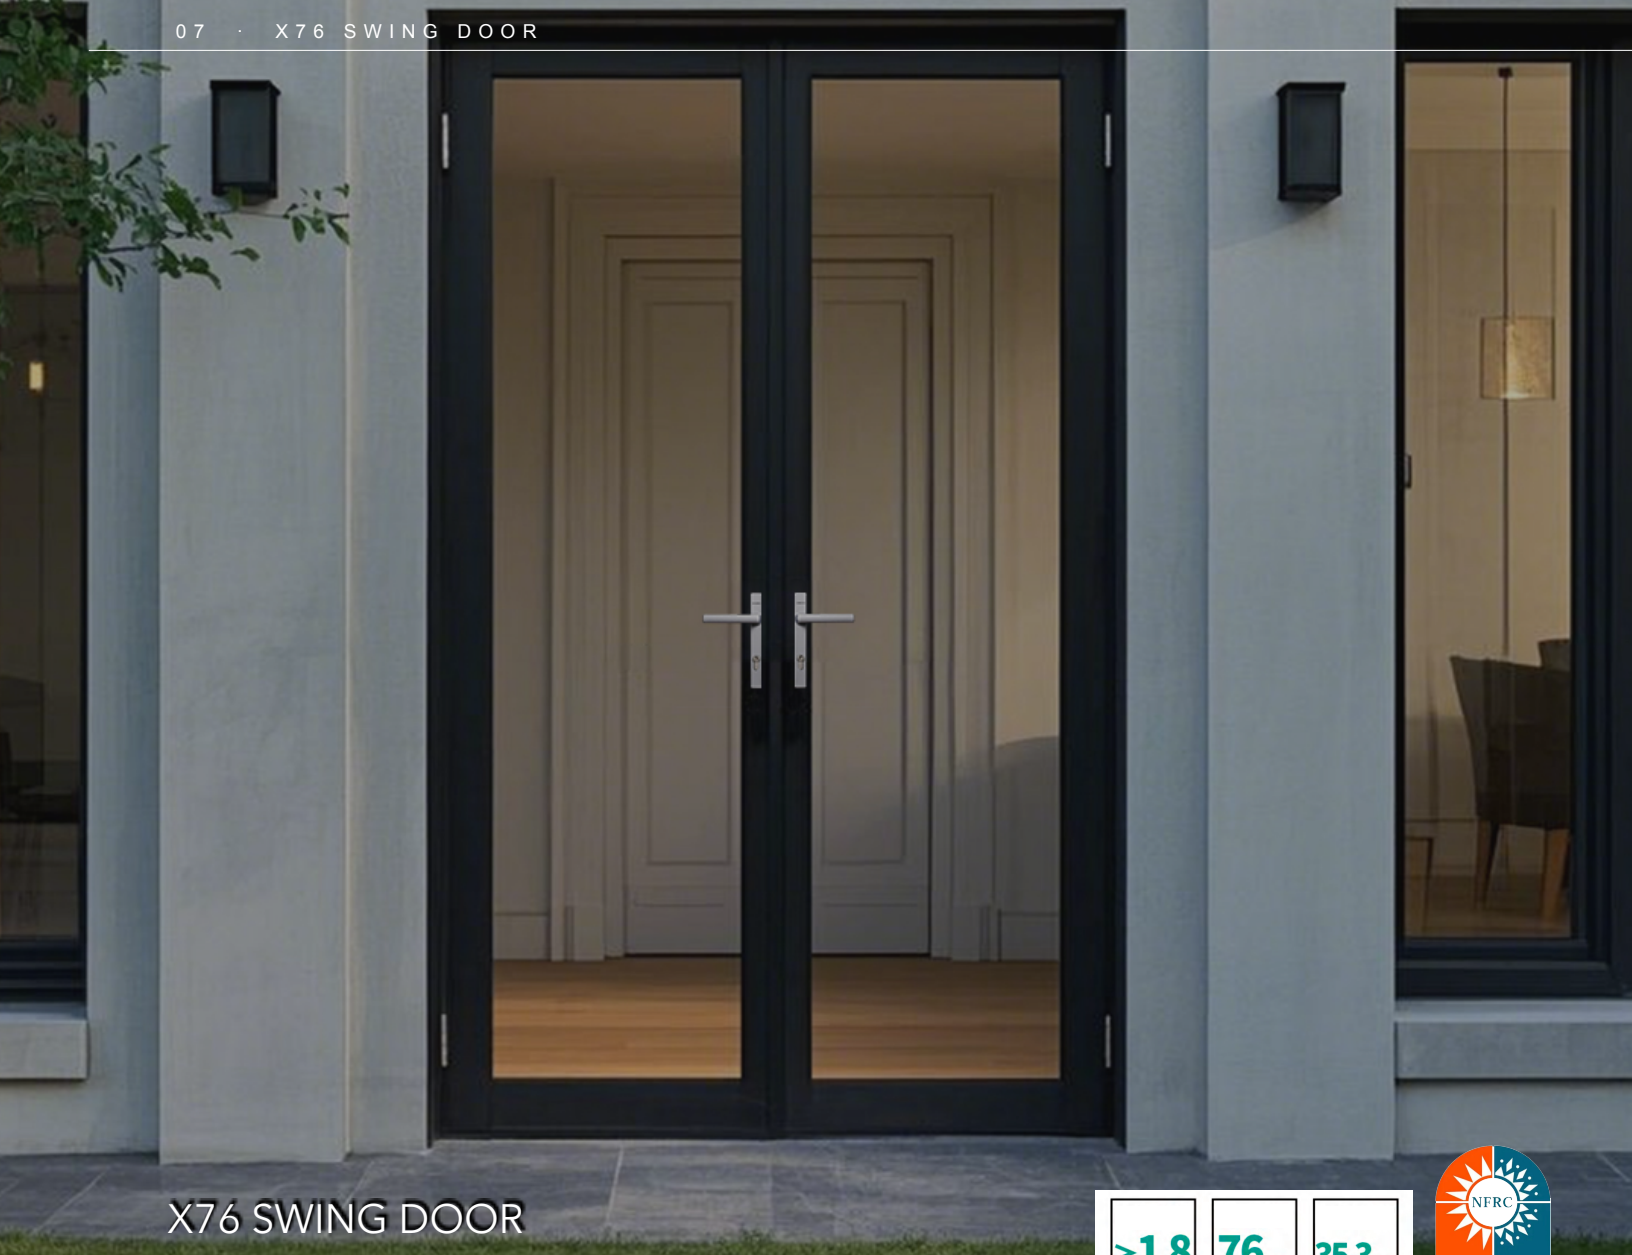

X76 SWING DOOR



OVERVIEW

A single or double out-swing or in-swing door within the X76 system. Designed for residential entries and balcony access where a consistent frame aesthetic across windows and doors is required.

KEY FEATURES & BENEFITS

- Shares the X76 frame depth, ensuring a flush, unified facade with adjacent windows
- Low-threshold option supports accessibility compliance
- Multi-point locking provides security and airtight closure
- Available in single leaf, double leaf (French door), and door-plus-sidelight configurations
- Suitable for residential entries, balcony access, and light commercial applications

- **THERMALLY BROKEN FRAMES**
Superior insulation for year-round comfort

- **SLIMLINE SIGHT LINES**
Maximum glass, minimal frame intrusion

- **CUSTOM POWDER COAT**
30+ color finishes to match any façade

- **NFRC CERTIFIED**
Meets NFRC Certifications Criteria

ALSO AVAILABLE IN: AWNING, PUSH-OUT CASEMENT



X76 SWING DOOR

TECHNICAL SPECIFICATIONS

Frame Depth	76 mm (3")
Glazing	Double glazed; up to 28 mm (1") unit
Door Width	Single leaf up to approx. 1200 mm (82 11/16"); double leaf up to approx. 2400 mm (94 1/2")
Door Height	Up to approx. 2700 mm (106 5/16")
Water Tightness	Class 9A (AS 2047)
Thermal Performance	Thermally broken aluminum
Hardware	Multi-point locking; lever handle sets; adjustable butt or concealed hinges
Threshold	Low-threshold and accessible threshold options
Finish	Powder coat; extensive color options